



# AGAVE WIRE

Toll-Free: (800) 690-3408

An ISO 9001 Certified Quality Management System

Email: sales@AgaveWire.com

## PRODUCT DATA SHEET


### **BORETOUGH™ Extra High Strength CCS 1150 Tracer Wire**

#### **PRODUCT OVERVIEW:**

AGAVE P/N:	BT-1201
CONSTRUCTION:	One 12 AWG Copper Clad Steel HMW-PE Insulated Conductor
APPROVALS:	UL - Tracer Wire
APPLICATION:	Extra High Strength Tracer Wire

#### **CONSTRUCTION PARAMETERS:**

CONDUCTOR:	12 AWG Copper Clad Steel
STRANDING:	Solid
NUMBER OF CONDUCTORS:	1
INSULATION MATERIAL:	HDPE (High Density Polyethylene)
INSULATION THICKNESS:	0.045" Nominal (+/- .003 per UL)
COPPER O.D.:	0.081" Nominal
FINISHED O.D.:	0.172" Nominal
WEIGHT PER 1000ft:	24.97 lbs./1000'

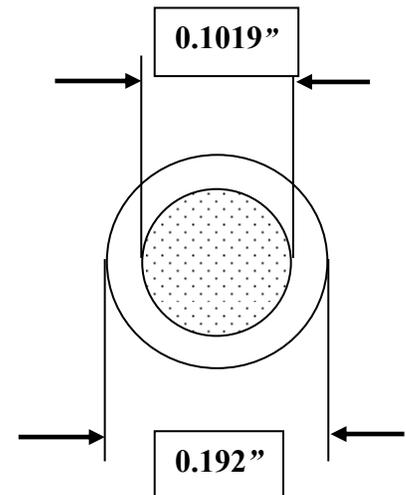

#### **ELECTRICAL & ENVIRONMENTAL PROPERTIES:**

TEMPERATURE RATING:	-20° c to 80° c
OPERATING VOLTAGE:	600V
INSULATION COLOR:	Various Colors Available
BREAK LOAD:	1150 LBS



#### **PRINT LEGEND:**

BORETOUGH™ 12 AWG PE(45) EXTRA HIGH STRENGTH CCS TRACER WIRE (UL) 600V E488566

On special orders, the customer will accept all mil lengths and +/- 10% of total order requested. The information presented here is, to the best of our knowledge, is true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise. This specification is proprietary intellectual property of Agave Wire. Any information contained herein shall not be disclosed to any party without written consent of Agave Wire.

**Manufactured in the U.S.A.**