



171N - 172N VALVE

171N: LEVER HANDLE - size 1/4" to 4".

172N: T-HANDLE - size 1/4" to 1 1/4".


171S: BALL AND STEM IN STAINLESS STEEL AISI 316 - size 1/4" to 4".

171NCR: CHROME PLATED - size 1/4" to 4".

COMMERCIAL STYLE

- Brass ball valve, FNPT threaded, full port.
- Pressure rating 600 WOG-150 WSP.
- Temperature range -4°F to +366°F.
- ANSI B1.20.1 connections.
- Blow-out proof stem, chrome plated brass ball.
- PTFE seats, seals, and thrust washer.
- Adjustable stem packing.
- 100% electronically tested in the open and closed position at 80 psi.
- Not to be used for drinking water.
- Valve to be used in fully open or fully closed position.

TECHNICAL SPECIFICATIONS:

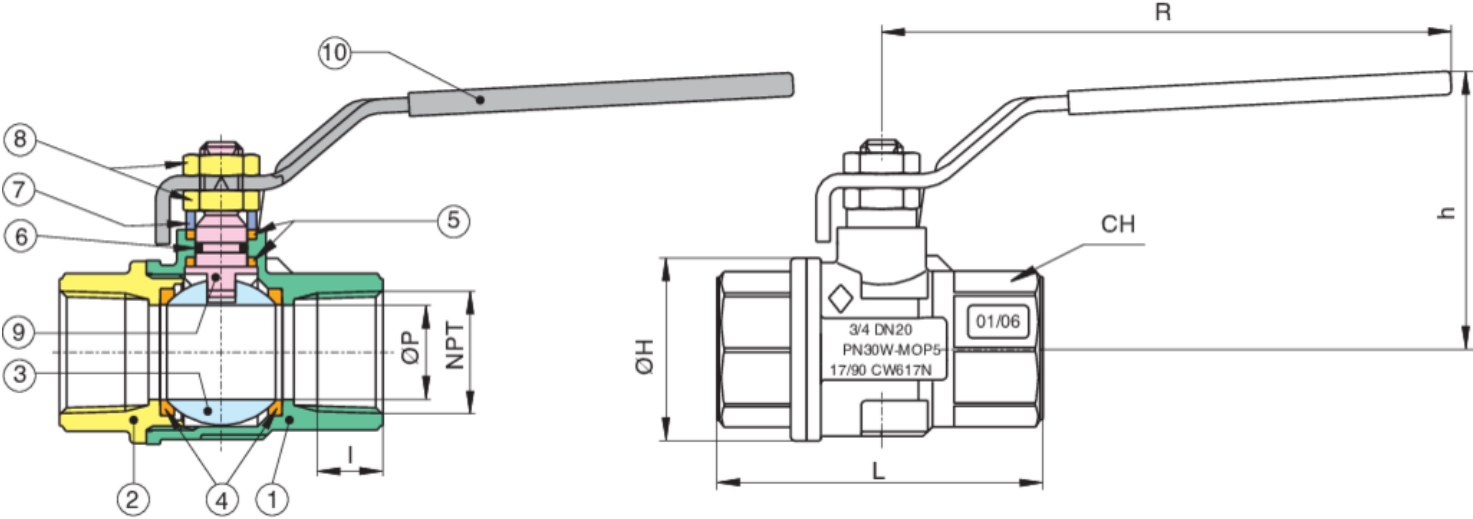

POSITION	PART NAME	MATERIAL	N.° PIECES
1	BODY	BRASS C37700	1
2	END CONNECTION	BRASS C37700	1
3	BALL	BRASS C37700	1
4	BALL SEAT	PTFE	2
5	THRUST WASHER/STEM SEAT	PTFE	2
6	O-RING	NBR	1
7	PACKING GLAND	BRASS C38500	1
8	NUT	STEEL CL04	2
9	STEM	BRASS C38500	1
10	HANDLE	Fe DD11 UNI EN 10111	1