

H-11179


Mueller® H-11179 Luboseal® Meter Valve -
175 psig

FEATURES:

- Sizes** – 1/2"x1/2"x3/4"*, 3/4", 1", 1-1/4", 2"
- Meets the test requirements specified in ASME B16.33
- Iron body valve
- Lock wing head
- Special lubrication system---can be re-lubricated under pressure
- O-ring sealed key
- Tamperproof feature
- Inlet and outlet with internal I.P. (F.I.P.) thread – insulating outlet
- Available finishes: black (as cast), galvanized, electro-coat epoxy gray, electro-coat Rustoleum gray – 1/2"x1/2"x3/4" size available in galvanized only
- 175 psig (1208 kPa)
- Available with 1/8" test port feature

*First size is size of inlet, second is size of outlet – when three sizes are given, second size is nominal size of port opening.

*Nominal

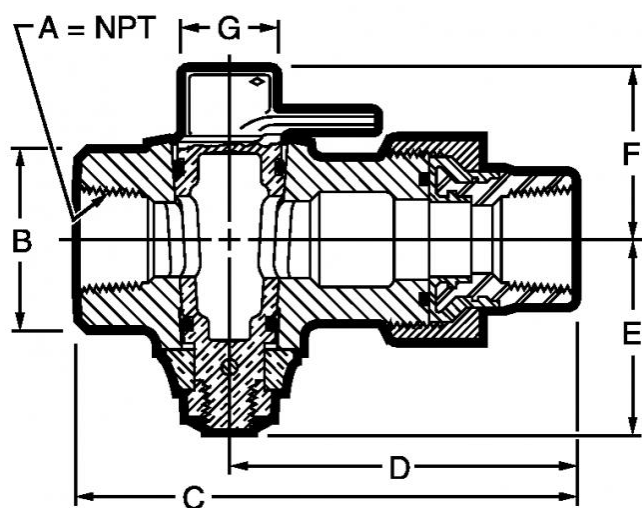

H-11179	Box Quantity
1/2"x1/2"x3/4"	12
3/4"	15
1"	10
1-1/4"	7
2"	3

MUELLER® H-11179 LUBOSEAL® METER VALVE DIMENSIONS:

Dimension	Valve Size**				
	1/2" x 1/2" x 3/4"*	3/4"	1"	1-1/4"	2"
A	1/2"-14 x 3/4" -14	3/4"-14	1"-11-1/2	1-1/4"-11-1/2	2"-11-1/2
B	1-35/64"	1-27/32"	2-15/64"	2-43/64"	3-5/32"
C	5-1/32"	5-13/64"	5-25/32"	6-11/32"	7-21/64"
D	3-5/8"	3-5/8"	3-7/8"	4-7/32"	4-11/16"
E	1-37/64"	1-31/32"	2-5/32"	2-9/16"	3-17/64"
F	1-17/32"	1-52/64"	2-1/8"	2-23/64"	3-3/16"
G	3/4"	59/64"	1-11/64"	1-27/64"	1-29/32"